


BLOC-END®

CONSTRUCTION & ENVIRONMENT

For material handling hoses

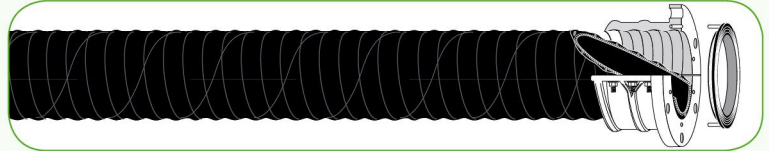

Applications

Connection of the PERFORMER hoses: PERFORMER GL AD10H, GL AD10P, GL AD10T.

Advantages

- Hoses can be cut to length on site or at manufacture to suit the specific installation requirements.
- Easy to cut: no special tooling is needed as the coupling face acts as a cutting guide.
- The flange can be adjusted easily for fitting and will not deform in service.
- Quick and easy to replace.
- The couplings can be removed from a damaged hose and reused on replacement.
- A lightweight connection system.

Technical description

PERFORMER hoses fitted with BLOC-END® couplings are suitable for:

ID ≤ 150 mm: working pressure 10 bar,

ID > 150 mm: 5 bar.

Standardised drilling.

Complementary information

Coupling protection with Teflon upon request.



BLOC-END® coupling

07/09/2007

| | ID mm | Bolts quantity | Article number | Stock (■) or min. order pieces |
|---|---|----------------|----------------|-----------------------------------|
| Complete BLOC-END® coupling (including half shells, gasket and bolts/nuts/washers) Drilling PN 10 | 40 | 4 | 0117042 | ■ |
| | 50 | 4 | 0117043 | ■ |
| | 65 | 4 | 0117044 | ■ |
| | 80 | 4 | 0117045 | ■ |
| | 100 | 4 | 0117046 | ■ |
| | 125 | 4 | 0117047 | ■ |
| | 150 | 4 | 0117048 | ■ |
| | 200 | 6 | 0117049 | ■ |
| | 250 | 6 | 0118093 | ■ |
| | 300 | 6 | 0118095 | ■ |
| | 350 | 6 | 5101097 | ■ |
| Complete BLOC-END® coupling (including half shells, gasket and bolts/nuts/washers) Drilling PN 20 (ASA 150) | 50 | 4 | 0117155 | ■ |
| | 65 | 4 | 0117156 | 25 |
| | 80 | 4 | 0117157 | 25 |
| | 100 | 4 | 0117158 | ■ |
| | 125 | 4 | 0117159 | 25 |
| | 150 | 4 | 0117048 | 25 |
| | 200 | 6 | 0117160 | ■ |
| | 250 | 6 | 0118094 | 25 |
| | 300 | 6 | 0118096 | 25 |
| | 350 | 6 | consult us | 25 |
| | Spare part-kit containing two half shells only (without gaskets and bolts) Drilling PN 10 | 40 | 4 | 0116890 |
| 50 | | 4 | 0116891 | ■ |
| 65 | | 4 | 0116893 | ■ |
| 80 | | 4 | 0116895 | ■ |
| 100 | | 4 | 0116897 | ■ |
| 125 | | 4 | 0116899 | ■ |
| 150 | | 4 | 0116901 | ■ |
| 200 | | 6 | 0116902 | ■ |
| 250 | | 6 | 0118089 | ■ |
| 300 | | 6 | 0118091 | ■ |
| 350 | | 6 | 5100847 | ■ |
| Spare part-kit containing two half shells only (without gaskets and bolts) Drilling PN 20 (ASA 150) | 50 | 4 | 0116892 | ■ |
| | 65 | 4 | 0116894 | 25 |
| | 80 | 4 | 0116896 | 25 |
| | 100 | 4 | 0116898 | ■ |
| | 125 | 4 | 0116900 | 25 |
| | 150 | 4 | 0116901 | 25 |
| | 200 | 6 | 0116903 | ■ |
| | 250 | 6 | 0118090 | 25 |
| | 300 | 6 | 0118092 | 25 |
| | 350 | 6 | consult us | 25 |
| | Spare part-kit containing two gaskets only Drilling PN 10 ou PN 20 (ASA 150) | 40 | 4 | 0116890 |
| 50 | | 4 | 0116891 | ■ |
| 65 | | 4 | 0116893 | ■ |
| 80 | | 4 | 0116895 | ■ |
| 100 | | 4 | 0116897 | ■ |
| 125 | | 4 | 0116899 | ■ |
| 150 | | 4 | 0116901 | ■ |
| 200 | | 6 | 0116902 | ■ |
| 250 | | 6 | 0118089 | ■ |
| 300 | | 6 | 0118091 | ■ |
| 350 | | 6 | 5100847 | ■ |
| Bolt, including nut and washer | 40 to 350 | | 0111322 | ■ |